

**A METHOD OF RESISTING CORROSION IN METAL REINFORCING ELEMENTS
CONTAINED IN CONCRETE AND RELATED COMPOUNDS AND STRUCTURES**

CROSS REFERENCE TO RELATED APPLICATION

125 5
C A 1

This application is a continuation-in-part of U.S. Serial No. _____ entitled "A METHOD RESISTING CORROSION IN METAL REINFORCING ELEMENTS CONTAINED IN CONCRETE AND RELATED COMPOUNDS AND STRUCTURES" in the name of Paul W. Brown filed on January 9, 2002, which is a continuation-in-part of U.S. Serial No. 10/101,581, filed 10 November 13, 2001.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a method of introducing into fresh concrete, as herein defined, compounds capable of sequestering chloride ions to establish resistance to corrosion of metal reinforcing elements contained within or contacting the concrete and provide a corrosion resistant oxide layer on the metal reinforcing elements, as well as related compositions and structures. The invention is also directed toward corrosion protection of concrete articles wherein the concrete has already set and hardened.

2. Description of the Prior Art

The advantageous use of metal reinforcing members, such as steel reinforcing members, in concrete for structural uses has been known for many years. Concrete is known to provide desired compressive strength, but tends to lack tensile strength. The reinforcing bars co-act with the concrete to provide enhanced tensile strength for the combination of materials. It has also been known to employ corrugated metal deck in combination with concrete to create a composite with similar benefits. Numerous other metal members have been embedded in concrete or provided in contact therewith to achieve enhanced benefits in the structural environment as a result of such materials. Among these additional materials are grids, beams, bolts, hold-downs and wire mesh.

One problem with such construction has arisen as a result of exposure of concrete to salts, such as calcium chloride and sodium chloride, on external structural members to resist the undesired accumulation of snow and ice on bridges and other concrete paved areas such as roadways, parking lots, sidewalks and the like. While these chloride salts do provide benefits in terms of de-icing of concrete surfaces, they frequently result in the chloride solutions migrating into the concrete decks and adjacent vertical concrete surfaces, such as walls and columns, also subjecting these to chloride intrusion. Also, saline seawater

may migrate into the pores of concrete exposed to seawater as in sea walls, With respect to bridge decks, in particular, an enhanced problem results from air movement under the deck creating an environment wherein the salts are aspirated into the concrete and salt laden solutions flow into the pores.

5 Regardless of the manner in which chloride enters such concrete, the chloride, upon reaching the steel reinforcing members, tends to accelerate corrosion of the same because the oxidation of the metal metallic iron to Fe^{2+} is catalyzed by the chloride. Also, oxides and hydroxides of Fe^{2+} frequently form and occupy porosity in the vicinity of the interface of the steel and concrete. In addition, oxides and hydroxides of Fe^{3+} may also be produced. As
10 these iron oxides and hydroxides are of greater volume than the iron metal from which they were produced, they tend to cause internal stresses which may become high enough to crack the concrete, and also degrade the desired bond between the metal reinforcing elements and the concrete.

 U.S. Patent 5,049,412 discloses a method of re-alkalizing concrete in
15 which carbonation has occurred. An outer layer of the concrete structure containing reinforcement which layer through exposure to air has been carbonated has an adjacent layer that remains relatively less carbonated. The patent discloses applying to the outer surface a water type adherent coating followed by introducing between the outer adjacent layers, water from a source external to the concrete structure and maintaining
20 the concrete structure in this condition for a period of time sufficient to effect diffusion of the alkaline materials from the relatively less carbonated adjacent layer into the relatively carbonated outer layer.

 U.S. Patent 5,198,082 discloses a process for rehabilitation of internally reinforced concrete, which includes temporary application of an adhered coating of an
25 electrode material to surface areas of the concrete. Distributed electrodes such as a wire grid is embedded in the coating. A voltage is applied to the reinforcement and distributed to the electrode to cause migration of chloride ions from the chloride into the electrolytic coding. Among the shortcomings of this approach are the need to provide, at the local source, a source of electrical power. This electrical equipment
30 might have to be maintained at the site for extended periods of time. This further complicates matters by establishing a risk of injury to children and others that might find the equipment at an attractive nuisance, as well as the risk of theft and vandalism. Also, such chloride extraction processes may alter the concrete microstructure by

making it more porous and permeable, thereby, facilitating enhanced re-entry of chloride when de-icing salts are again applied to the exterior.

It has been known to employ nitrites, such as calcium nitrite, in resisting corrosion of steel parts in concrete. It is believed that the nitrites oxidize the Fe^{2+} to Fe^{3+} which, in turn, precipitates as Fe_2O_3 . The Fe_2O_3 thus formed tends to act as a barrier to further contact between the chloride and the steel. See, generally, U.S. Patents 4,092,109 and 4,285,733. Neither calcium nitrate nor Fe_2O_3 , however, function to sequester chloride. The latter provides merely a barrier.

There remains, therefore, a very real and substantial need for a method and related composition and structure which will resist undesired corrosion of metal structural elements contained within, or in contact with, concrete structural members.

SUMMARY OF THE INVENTION

The present invention has met the above-described need.

The method, in one embodiment, includes resisting corrosion in concrete containing metal reinforcing elements composed of steel, copper, galvanized steel, tin plated steel or other structurally suitable metals by introducing into fresh concrete containing metal reinforcing elements at least one compound capable of sequestering chloride ions in a low solubility compound.

In connection with steel reinforcing elements, a low solubility compound within which the chloride ions are sequestered preferably also is created in a reaction that releases nitrite, which serves to oxidize Fe^{2+} to thereby provide a corrosion-resisting oxide layer on the steel reinforcing elements. This, therefore, in connection with steel achieves two levels of corrosion resistance, one of which is the actual capturing or sequestering of the potentially damaging chloride ions, and the second of which provides a protective layer on the metal reinforcing elements.

Sub 27 Among the preferred compounds for use in the method of the present invention are one or more compounds selected from the group consisting of $3\text{CaO}\cdot\text{Al}_2\text{O}_3\cdot\text{Ca}(\text{NO}_2)_2\cdot n\text{H}_2\text{O}$; $3\text{CaO}\cdot\text{Al}_2\text{O}_3\cdot\text{Ca}(\text{NO}_3)_2\cdot n\text{H}_2\text{O}$; and $3\text{CaO}\cdot\text{Fe}_2\text{O}_3\cdot\text{Ca}(\text{NO}_2)_2\cdot n\text{H}_2\text{O}$; wherein $n = 0$ to 18 and preferably 10 to 18, depending upon the relative humidity to which a compound is equilibrated. If desired, lower values of "n" may be obtained by drying at low relative humidity as by evacuation or by heating, for example.

A further compound employed in another embodiment of the invention is, $3\text{Me(II)O}\cdot\text{R}_2\text{O}_3\cdot\text{Me(II)(anion)}_2\cdot n\text{H}_2\text{O}$ wherein Me(II) is one or more divalent cations, such as CO_2 for example, R_2 is Al_2 , Fe_2 or Cr_2 anion is NO_2 , NO_3 , CO_3 , BO_4 or OH and n is 0 to 18, and preferably 10 to 18. For some formulations, the anion may be divalent. In this case the

Sub
C2

formula would be $\text{Me(II)O} \cdot \text{R}_2\text{O}_3 \cdot \text{Me(II)(anion)}_n\text{H}_2\text{O}$ wherein n is 0 to 18 and preferably 10 to 18.

5 The invention also contemplates a concrete structure which has hydrated fresh concrete and a plurality of metal structural elements in contact with the hydrated fresh concrete with a compound which sequesters chloride ions dispersed within the concrete.

10 The invention in another embodiment contemplates rehabilitation of existing concrete structures by providing a chloride sequestering compound in a member adjacent to the concrete structure and having a composition such that migration of chlorine ions away from metal structural elements in the concrete structure and into the adjacent overlay may be effected. In addition, if desired, release of nitrite to migrate into the concrete structure and afford corrosion protection to embedded steel.

15 In one version, the overlay, which may be formed in situ or as a preformed panel, contains the chloride-sequestering compound. In another, a slurry may be applied to the concrete structure with or without an overlay secured thereover.

The invention also contemplates in situ formations of the desired compounds which are suitable for either chloride ion sequestration and nitrite release in order to establish an oxide protective layer over the metal elements.

20 The compound may be formed by adding certain materials to fresh concrete with a reaction product of cement hydration yielding a further component or separately adding the component. The in situ concept may also be employed in remediation of existing concrete structures.

25 Alternate sources of aluminum for use in creating the compound may be provided.

In another approach, sources of calcium and aluminum may be provided separately or as an admixture introducing the desired compound.

It is an object of the present invention to provide a method and related compounds and structures for inhibiting corrosion of metal elements positioned within or in contact with concrete in a structural environment.

30 It is a further object of the present invention to provide such a system wherein undesired chloride ions will, as a result of a reaction, be sequestered, thereby reducing their ability to corrode the metal elements.

It is yet another object of the invention to, through a reaction effecting such sequestration of ions, to provide free nitrites which will oxidize the Fe^{2+} to a Fe^{3+} ion which, in turn, precipitates as Fe_2O_3 which coats the metal element and, thereby, resists corrosion.

5 It is yet another object of the present invention to provide such a system which employs unique compounds.

It is another object of the present invention to provide such a system which will effectively and rapidly provide corrosion resistance to steel and other metals.

10 It is yet another object of the invention to provide such a system which may be employed by merely adding one or more compounds of choice to fresh concrete without requiring substantial changes in conventional practices employed in producing and placing the concrete structure.

15 It is a further object of the present invention to provide such a system where an existing concrete structure may be rehabilitated through by sequestering the chloride and providing a means to accumulate nitrite ions in the vicinity of the embedded steel. It is appreciated that the nitrite ions oxidize presently corroding steel to produce a protective layer. In some formulations nitrite ions may not be available and in these instances rehabilitation is the result of chloride sequestration only.

20 It is yet another object of the present invention to provide such a system wherein an overlay, which contains a composition which may be of the type employed in other embodiments of the invention and facilitates sequestering of chloride and corrosion protection of metal structural elements. In another version, a slurry containing the compound of interest may be applied to the concrete structure with an overlay material either formed in situ or as a preformed panel secured thereover.

25 It is yet another object of the present invention to provide such a system for rehabilitation of existing concrete structures without requiring a source of electrical energy to be present on an ongoing basis during the performance of the method.

It is a further object of the present invention to provide for creation of the desired compound in situ in fresh concrete, or as a component, or with it, employed with one or more components employed in creating the fresh concrete.

30 It is yet another object of the present invention to provide in situ creation of the desired compound in the course of creating a slurry or preformed panel employed in remediation existing concrete structures.

It is yet another object of the present invention to provide for such in situ creation of the compound by adding certain materials either in solution or in the mixing water employed to prepare the concrete.

5 It is yet another object of the present invention to employ sources of aluminum other than calcium aluminate cement in creating the desired compound.

It is further an object of the present invention to provide alternate sources of calcium and aluminum in creating the desired compound.

These and other objects of the invention will be more fully understood from the following description of the invention with reference to the drawings appended hereto.

10 **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is a schematic cross-sectional illustration of a concrete bridge deck containing metal reinforcing elements.

Figure 2 is a schematic cross-sectional illustration similar to Figure 1, but showing a construction having an overlay containing the chloride sequestering
15 composition.

Figure 3 is a schematic cross-sectional illustration similar to Figure 2 except that the overlay consists of a slurry adjacent to the concrete structure and an overlaying material.

Figure 4 illustrates a cross-sectional illustration looking downward on a
20 concrete piling which is to be rehabilitated through the system of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

As employed herein the term "concrete structure" refers to an existing structure which is composed in at least significant part of concrete which has set and hardened, as contrasted with "fresh concrete" as defined herein and shall expressly
25 include, but not be limited to, bridges, roadways, parking lots, sidewalks, parking garages, floors, support columns, piers, marine structures, piling, conduits and other concrete structures whether located inside or outside, and whether subject to vehicular or foot traffic thereover or not.

As employed herein, the term "fresh concrete" means concrete which is in a
30 plastic state.

As employed herein reference to "introducing" a compound into fresh concrete shall be deemed to include introducing the compound in solid form and in slurry form with or without other ingredients such as minerals and additives into fresh concrete and shall also

embrace admixing or blending the composition in dry form with dry cement and/or other ingredients prior to water being added.

As employed herein, the term "metal elements" means metal elements placed within or in contact with concrete for various purposes including, but not limited to, structural purposes and shall expressly include, but not be limited to, reinforcing bars, grills, beams, metal deck hold downs and wire mesh.

As shown schematically in Figure 1, a layer of concrete 2, overlies and is supported by a deck member 4. The concrete in the form shown has a plurality of elongated, generally parallel, reinforcing bars 6, 8, 10, 12, 14, 16, 18. This assembly may be created in a conventional manner to provide the desired structure which, in the form shown, may be a bridge deck having an undersurface 22, exposed to air 24 and an upper surface 26, which may have undesired snow deposited thereon or ice formed thereon. Application of calcium chloride, sodium chloride or other chloride containing salts to the upper surface 26, or the overlying ice and snow (not shown) results in chloride penetration into the concrete interior and, if not inhibited, contact with the metal reinforcing bar 6-18 (even numbers only) which will generally be composed of steel to create the undesired corrosion.


For convenience of reference herein, the use of metal elements such as steel reinforcing bars 6-18 (even numbers only) will be discussed. It will be appreciated that corrosion inhibition of other types of metal elements such as those made of or coated with copper, tin or zinc, for example, may benefit from the present invention.

In one embodiment of the invention, there is not only provided free nitrite, which oxidizes ferrous (Fe^{2+}) to ferric (Fe^{3+}) ion to thereby effect precipitation of Fe_2O_3 to form an iron oxide barrier, but also provides means to sequester chloride which enters the concrete porosity by capturing the same in low solubility compounds.

As employed herein the term "low-solubility compounds" means, chloride-containing compounds exhibiting solubilities substantially below those of sodium chloride or calcium chloride, and shall include, but not be limited to, chloride-containing compounds, which at saturation in aqueous solutions permit less than about 1 kg of soluble chloride per cubic meter of concrete. A chloride level of about 1 kg/m^3 is considered the threshold level for corrosion.

In general, the invention contemplates the addition of any compound into which chloride ions would enter to produce a low solubility compound that sequesters the chloride.

An example of a preferred reaction of the present invention, which accomplishes both the objective of creating an iron oxide barrier and the sequestering of chloride, is shown in reaction (1).



5 In this example $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O}$ wherein $n = 10$ is added to fresh concrete as a particulate solid. The reaction that occurs is the chloride from the de-icing salts used on the hardened concrete reacts to produce Friedel's salt, which sequesters the chloride and, in addition, serves to release nitrite in order to oxidize any Fe^{2+} . In adding the particulate compound, $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O}$, is added to the fresh concrete, it is preferred that in
10 general about 3 to 88 pounds of the particulate solid will be added per cubic yard of hydrated fresh concrete, and preferably about 22 to 66 pounds per cubic yard. The exact amount will be influenced by the anticipated rates of chloride ingress into the concrete having the usual range of water-to-cement ratios, e.g., 0.35 to 0.50. The admixture may, if desired, be employed in concrete having lower water-to-cement ratios such as 0.25 to 0.35, for example,
15 or higher ratios such as 0.5 to 0.9, for example. In general, the higher the anticipated rate of chloride ingress, the larger the amount of particulate composition employed. The compound is admixed with the hydrated fresh concrete to achieve substantially uniform distribution thereof. When the concrete sets, this constituent will be present in the concrete to receive and interact with chlorine from the icing salts that penetrates the pores of the concrete. This compound
20 ($3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O}$) is generally stable over the range of pH values normally encountered in concrete. The resultant compound $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{CaCl}_2 \cdot 10\text{H}_2\text{O}$ is a low solubility compound within which the chloride is sequestered. This compound, is more stable than the nitrite. Chloride will exchange for the nitrite thereby freeing the nitrite and sequestering the chloride. As a result, the concentration of chloride in the concrete at the
25 surface of the steel, such as re-bars 6-18 (even numbers only) will be reduced as compared with concrete not containing the compound. This same reaction may be employed with the same result substituting Fe_2O_3 for Al_2O_3 in the starting material. This would result in the reaction $3\text{CaO} \cdot \text{Fe}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O} + 2\text{Cl}^- \Rightarrow 3\text{CaO} \cdot \text{Fe}_2\text{O}_3 \cdot \text{CaCl}_2 \cdot n\text{H}_2\text{O} + 2\text{NO}_2^-$

 In lieu of providing the compound such as $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O}$ in dry
30 particulate form, it may be presented as a slurry with a pH of about 10 or greater with the particulate being present in the slurry in the range of about 5 to 60 weight percent and preferably about 10 to 35 weight percent. The slurry then would be admixed with the hydrated fresh concrete.

In lieu of introducing the particulate solid or slurry into hydrated fresh concrete, if desired, one may admix the particulate solid or slurry with one or more of the dry components of the concrete such as the cement, for example.

In lieu of the compound employed in reaction (1), other compounds may be used to create essentially the same reaction with the following differences. Among these compounds are, $3\text{CaO}\cdot\text{Fe}_2\text{O}_3\cdot\text{Ca}(\text{NO}_2)_2\cdot n\text{H}_2\text{O}$ wherein $n = 0$ to 24 ;
 $3\text{CaO}\cdot\text{Al}_2\text{O}_3\cdot\text{Ca}(\text{NO}_3)_2\cdot n\text{H}_2\text{O}$ wherein $n = 0$ to 24 ;
and $3\text{CaO}\cdot\text{Fe}_2\text{O}_3\cdot\text{Ca}(\text{NO}_3)_2\cdot n\text{H}_2\text{O}$ wherein $n = 0$ to 24 .

Also, $3\text{Me}(\text{II})\text{O}\cdot\text{R}_2\text{O}_3\cdot\text{Me}(\text{II})(\text{anion})_2\cdot n\text{H}_2\text{O}$ wherein $\text{Me}(\text{II})$ is one or more cations, R_2 is Al_2 , Fe_2 or Cr_2 , anion is NO_2 , NO_3 or OH and $n = 0$ to 24 may be employed. These approaches, in many instances, involve a substitution in the compound employed in equation (1) for the aluminum, for the calcium or the nitrite. As to the substitution for the nitrite, this would be replaced by nitrate in equation (1) $3\text{CaO}\cdot\text{Fe}_2\text{O}_3\cdot\text{Ca}(\text{NO}_3)_2\cdot n\text{H}_2\text{O}$ or $(3\text{CaO}\cdot\text{Al}_2\text{O}_3\cdot\text{Ca}(\text{NO}_2)_2\cdot n\text{H}_2\text{O})$. As stated hereinbefore, the anion may be divalent in which case the formula would be $3\text{Me}(\text{II})\text{O}\cdot\text{R}_2\text{O}_3\cdot\text{Me}(\text{II})(\text{anion})n\text{H}_2\text{O}$ wherein n is 0 to 18 and preferably 10 to 18 . In other compositions, nitrite could be replaced by carbonate, borate or other anions.

The nitrites have the advantage of sequestering chloride in addition to liberating a species capable of rapidly oxidizing ferrous (Fe^{2+}) ions near the surface of corroding seal to ferric (Fe^{3+}) ions to facilitate the formation of a protective layer of ferric oxide or hydroxide on the steel.

It is understood that the value of "n", meaning the number of waters of hydration, may vary, depending on the relative humidity to which the compounds are exposed.


Among the preferred compounds for use in the invention are, $3\text{CaO}\cdot\text{Al}_2\text{O}_3\cdot\text{Ca}(\text{NO}_2)_2\cdot n\text{H}_2\text{O}$ and $3\text{CaO}\cdot\text{Fe}_2\text{O}_3\cdot\text{Ca}(\text{NO}_2)_2\cdot n\text{H}_2\text{O}$ in terms of effectiveness for both chloride sequestration in concrete and protective oxide layer formation of metal embedded or in contact with concrete. It is preferred that $n = 0$ to 24 .

EXAMPLE 1


In order to provide more detailed information regarding the manner of synthesizing the compounds, examples will be provided.

In the synthesis of $3\text{CaO}\cdot\text{Al}_2\text{O}_3\cdot\text{Ca}(\text{NO}_2)_2\cdot n\text{H}_2\text{O}$ wherein $n = 0$ to 24 , the following procedure may be followed.

In employing $3\text{CaO}\cdot\text{Al}_2\text{O}_3$ the following process of synthesis may be employed:

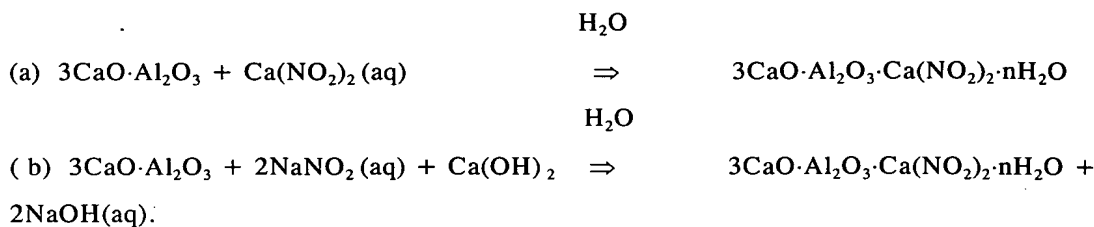

In employing $\text{CaO} \cdot \text{Al}_2\text{O}_3$ the following process of synthesis may be employed:

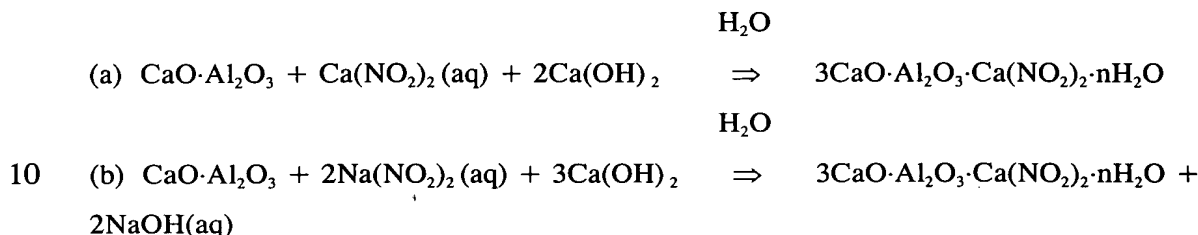


The presence NaOH does not appear to interfere with sequestration of chloride or with the action of nitrite on steel and, as a result, it is not necessary to remove the NaOH by washing the product compounds. Alternatively, the $3\text{CaO} \cdot \text{Al}_2\text{O}_3$ and $\text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O}$ can be crystallized and separated from the NaOH solution.

In each of these two examples, the $\text{Ca}(\text{OH})_2$ and calcium aluminate were employed as fine powders. $\text{Ca}(\text{NO}_2)_2$ and NaNO_2 are commercially available and highly soluble in water. While there are no critical particle size distributions, in general, it is preferred to have a particle size such that 99% of the powder passes through a 325 mesh sieve. Commercially available $\text{Ca}(\text{OH})_2$ was employed as was commercially available $\text{CaO} \cdot \text{Al}_2\text{O}_3$ with the latter being employed as a refractory cement. The synthesis in each case was carried out at room temperature by mixing the reactives with approximately 10 times their weight of water in suitable sealed containers. Their reaction occurred more rapidly if the contents of the containers were stirred or agitated. Optionally, if desired, grinding media such as Zirconia media, for example, may be placed in the containers.


The nitrate chloride sequestering compound $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_3)_2 \cdot n\text{H}_2\text{O}$ wherein $n = 0$ to 24 can be produced in the manner described in the foregoing two examples employing tri-calcium aluminate or mono-calcium aluminate and calcium hydroxide.

In using $3\text{CaO} \cdot \text{Al}_2\text{O}_3$ as a starting material, the following process can be employed.

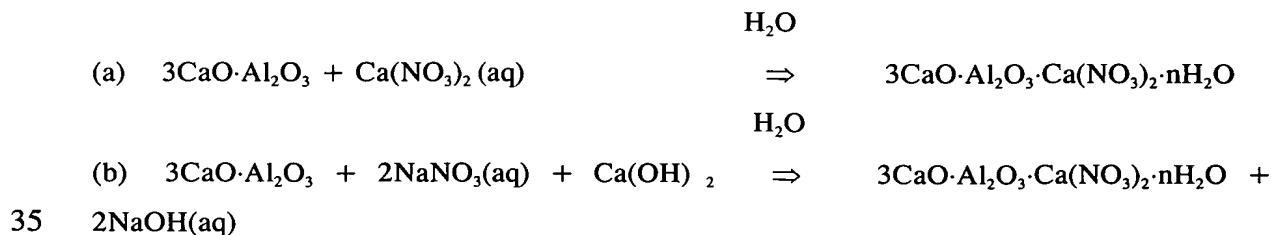

wherein $n = 0$ to 24.

Employing $\text{CaO} \cdot \text{Al}_2\text{O}_3$ as the starting material, the following process can be employed.

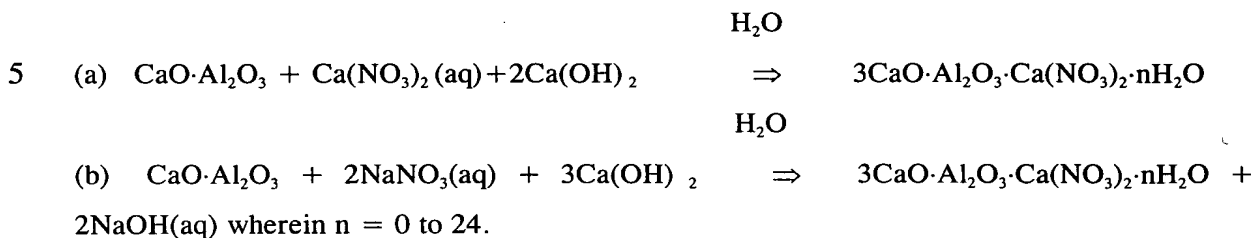

The presence NaOH does not appear to interfere with sequestration of chloride or with the action of nitrite on steel and, as a result, it is not necessary to remove the NaOH by washing the product compounds. Alternatively, the $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_3)_2 \cdot n\text{H}_2\text{O}$ and $\text{Ca}(\text{NO}_3)_2$ can be crystallized from the NaOH solution.

EXAMPLE 2

The phase $3\text{CaO} \cdot \text{Fe}_2\text{O}_3 \cdot \text{CaCl}_2 \cdot n\text{H}_2\text{O}$ wherein $n = 10$ has been created by reacting the precursors $3\text{CaO} \cdot \text{Fe}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O}$ and $3\text{CaO} \cdot \text{Fe}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_3)_2 \cdot n\text{H}_2\text{O}$ with chloride. This indicates that chloride ions can be sequestered in the Fe analog of Friedel's salt ($3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{CaCl}_2 \cdot 10\text{H}_2\text{O}$). The compounds $3\text{CaO} \cdot \text{Fe}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O}$ and $3\text{CaO} \cdot \text{Fe}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_3)_2 \cdot n\text{H}_2\text{O}$ have also been produced employing $2\text{CaO} \cdot \text{Fe}_2\text{O}_3$ in the presence of supplementary Ca from $\text{Ca}(\text{OH})_2$ and nitrite or nitrate from their calcium and/or sodium salts. $2\text{CaO} \cdot \text{Fe}_2\text{O}_3$ may be produced by blending Fe_2O_3 and CaCO_3 in a molar ratio of about 2:1 followed by sintering this mixture at 1150°C for approximately 1.5 hours. The mixture of CaO and $2\text{CaO} \cdot \text{Fe}_2\text{O}_3$ is produced by calcining 3 moles of CaCO_3 with 1 mole of Fe_2O_3 at 1100°C for approximately 1.5 hours. A variety of reaction times and temperatures can be used in the synthesis of this compound or this mixture. After cooling the $2\text{CaO} \cdot \text{Fe}_2\text{O}_3$ or the mixture of $2\text{CaO} \cdot \text{Fe}_2\text{O}_3$ and CaO were ground to an average particle size of approximately 10 microns using known comminution techniques.

EXAMPLE 3

The compounds $3\text{CaO}\cdot\text{Fe}_2\text{O}_3\cdot\text{Ca}(\text{NO}_3)_2\cdot n\text{H}_2\text{O}$ may be produced by calcining 1 mole of CaCO_3 with 3 moles of Fe_2O_3 at 1100°C for about 1.5 hours. This produces a mixture of CaO and $2\text{CaO}\cdot\text{Fe}_2\text{O}_3$. This mixture is then ground and reacted with
5 either NaNO_3 or $\text{Ca}(\text{NO}_3)_2$ under basic conditions. In the event that NaNO_3 is used, it is preferred to add supplemental calcium. This may be added as CaO or $\text{Ca}(\text{OH})_2$ for example.

With respect to compound $3\text{Me}(\text{II})\text{O}\cdot\text{R}_2\text{O}_3\cdot\text{Me}(\text{II})(\text{anion})_2\cdot n\text{H}_2\text{O}$ wherein R_2 is Al_2 , Fe_2 or Cr_2 , anion is NO_2 , NO_3 or OH and n is 0 to 24 where $\text{Me}(\text{II})$ is a cation
10 such as Ca , but may be partially substituted by other divalent cations or may be completely substituted by other divalent cations such as Ba , Sr , Mn , Zn , for example. For some compositions divalent anions such as carbonate or borate may be used.

Referring to Figure 2, wherein an existing concrete structure 2 having reinforcing metal elements 6-18 (even numbers only) is shown with an underlying deck
15 member 4, which may or may not be present in connection with the rehabilitation of existing concrete structures as provided in this embodiment of the invention. An overlay 30, which in the form illustrated, it is concrete containing a compound usable in the present invention to sequester chloride ions with or without the capability of releasing nitrites to establish an oxide coating on the metal reinforcing member 6-18 is
20 shown. This overlay 30 preferably has a porosity similar, or in excess of, to that of the concrete in the structure so as to permit free movement of chloride ions and nitrites therebetween. The thickness T of the overlay 30 may be in the order of 0.5 to 10 inches with a preferred thickness being about 1-4 inches.

The overlay 30 may be established in situ and self-bonded to the upper
25 surface 32 of the concrete structure. In the alternative, the overlay 30 may be a preformed panel containing the compound which may be secured to the concrete structure 2 by any desired means such as an adhesive material preferably provide a continuously between the overlay 30 and the concrete layer 2 without interfering meaningfully with porosity in the interchange between the two structural elements or
30 may be provided in certain locations leaving other areas for surface-to-surface contact between the overlay 30 and the concrete member 2. A suitable adhesive for this purpose is latex.

In lieu of the concrete material employed in overlay 30, other suitable materials having the desired strength, porosity and other characteristics needed for the present invention, may be employed. Among these are asphaltic materials, clay and clay-like materials and other cement materials including but not limited to Portland cements, blends of Portland cement with other materials such as fly-ash, slag or silica fume, calcium aluminate cements and mortars.

5
10
15
20
The overlay 30 provides a number of beneficial actions, which facilitate rehabilitation of the existing concrete structure 2. First of all, chloride will migrate out of the concrete 2 in response to the concentration gradient produced in the pore structure of the concrete 2, the pore structure across the interface with the overlay 30 and with the pore structure of the overlay 30 itself. The admixture in the overlay 30 sequestered chloride ions that enter the overlay 30. Nitrite will migrate from the overlay 30 into the concrete 2 and toward the reinforcing steel 6-18 (even numbers only) in response to the concentration ingredient produced in the pore structure of the concrete itself, in the pore structure across the interface at surface 32 between the concrete 2 and overlay 30 and within the pore structure of the overlay 30 itself. The nitrite facilitates formation of a protective coating on the metal reinforcing elements 6-18, which may be composed of steel. All of this is accomplished without requiring prior art external electric current application. The system, therefore, results in passive chloride extraction.

25
30
~~Sub C3~~ If desired, in order to enhance the efficiency of maintaining the desired continuous moisture path, through which the chloride ions and nitrite can move, additional wetting may be applied and a low porosity overlay (not shown) overlying the upper surface 33 of the overlay 30 may be provided in order to seal the moisture in the structure. Also, rain may enhance such moisture paths. The low porosity overlay 30 may be applied as a self-bonding coating established in situ or as a preformed element secured to surface 33.

30
In employing the process in connection with Figure 2 and the embodiment describing in connection with Figure 3, the compounds previously disclosed herein may be employed. It will be understood that those compounds which both sequester chloride ions and release nitrite will result in both the sequestration of

chloride ion and releasing of nitrite serving to create the protective oxide layer around the metal reinforcing members 6-18 in the manner described herein.

Sub 4 Referred to Figure 3, there is shown an embodiment similar to that of Figure 2 except that the overlay 30 has a lower portion which is a separately formed slurry 34 disposed between the upper surface 32 of existing concrete structure 2 and the upper portion of overlay 30 with the overall thickness of the overlay 30 remaining within the range of thickness T. The slurry will be porous to facilitate migration of chloride ions and nitrite between it and the underlying concrete structure 2. The porosity of the slurry 34 will be such as to maintain communication with the underlying concrete 2. The slurry 34, which may be employed alone (not shown) or in combination with another portion of overlay 30 as shown in Figure 3, will contain the compound employed to effect the objectives of the invention and may also include cements and sand as desired. In cases where slurry 34 is employed preferably alone it has a thickness of about 1/8 inch to 4 inches. In general, it will have a water to solids ratio of the slurry will facilitate its being pumpable or spreadable with the capability of hardening with the consumption of free water during formation of and $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O}$. Wherein $n = 0$ to 24. The water to solids ratios may be about 0.25-5 and preferably about 0.4 to 1.0. The slurry is pumped, sprayed, troweled or otherwise placed on the surface 32 to create slurry layer 34. The thickness of the slurry preferably will be in the range of about 0.125 to 4 inches and if sand is not present in the composition, will preferably be in the range of about 0.25 to 0.5 inch. With sand, the range is preferably about 0.5 to 1.0 inch. It will be appreciated that if in lieu of the composition previously recited in this paragraph, the composition $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_3)_2 \cdot n\text{H}_2\text{O}$ wherein $n = 0$ to 24 were employed as nitrate is not regarded as a corrosion inhibitor in the sense of creating an oxide protective coating on the metal elements, this compound would provide solely a means for removing chloride ions from the concrete, but not inhibition of corrosion of embedded steel or other metal. The amount of the compound employed in a specific installation can be determined by the amount of chloride that has entered the concrete structure and can be determined readily by those skilled in the art.


Referring to an embodiment wherein the vertical concrete structural be remediated, Figure 4 shows a piling 40 which is generally vertically oriented and may

be located under water. It has a plurality of elongated steel reinforcing members 42, 44, 46, 48, 50 embedded therein. A continuous clamshell 60 has been placed around the piling 40 to create an annular region 64 within which a slurry of the present invention may be introduced. The clamshell 60 may be in segments which are
5 longitudinally adjacent to each other and secured to each other. They may be joined by bolts or other suitable mechanical means such as cables, or clamps. The annular region 64 has the slurry introduced after the clamshell 60 is placed in the space with the slurry being pumped in to displace water within an annular region 64. In other respects, the system of the invention performs in the identical manner as previously
10 described herein.


It will be appreciated that depending upon the specific nature of the concrete structure to be remediated and the location and nature of the environment in which it is being employed, certain preferred refinements of this embodiment of the invention may be employed. For example, in situations where vehicular or foot traffic
15 may be imposed on the concrete structure and an overlay with high strength should to be provided. Also, for example, in situations where the concrete structure will be subjected to a freeze-thaw cycles certain preferred approaches may serve to minimize the effects of the same. For example, an air-entrained admixture may be provided in slurry 34 of Figures 3 to counteract the effects of the freeze-thaw cycles. Such an
20 approach might involve adding a chemical in a small amount, such as about 0.1 % of the weight of the concrete, for example, to produce small bubbles when the concrete freezes the water in the porosity migrates into the bubbles and freezes harmlessly.

An alternate way of minimizing the effect of the freeze-thaw cycle would be maintain a high ionic strength liquid in the porosity of the slurry. The more
25 ions dissolved in water the lower the freezing temperature. For example, soluble nitrite salts such as calcium nitrite, calcium nitrite, sodium nitrate, or sodium nitrite may be employed for this purpose and function to increase the concentration ingredient in nitrite and thereby facilitate movement of nitrite into the concrete.

Another compound suitable for use in the present invention would
30 involve the use of the source of aluminum not coming from cement. This would result from the use of sodium aluminate NaAlO_4 . This may be accomplished by the following approaches.




or



In certain embodiments of the invention, the aluminum constituent was provided in alumina form from calcium aluminate cement ($\text{CaO} \cdot \text{Al}_2\text{O}_3$), or tricalcium aluminate cement ($3\text{CaO} \cdot \text{Al}_2\text{O}_3$). Other sources may be employed. The alternate materials could be a source of alumina, aluminate or aluminum hydroxide having sufficient reactivity to form the desired admixture. For example, an alumina selected from the group consisting of alpha alumina, flash calcined alumina, and transition aluminas may be employed. Transition aluminas include gamma alumina, theta alumina, and kappa alumina, for example. Other calcium aluminates such as $\text{CaO} \cdot 2\text{Al}_2\text{O}_3$ or $\text{CaO} \cdot 6\text{Al}_2\text{O}_3$ for example, could be employed. Suitable aluminates would include a source containing the AlO_2^- ion and other alumina salts. Among the suitable aluminates are sodium aluminate and potassium aluminate.

Among other sources are organo-aluminates, such as sec-butoxide for example. Other suitable sources are aluminum hydroxides such as non-crystalline gels, forms of Al(OH)_3 such as gibbsite or bayerite, forms of AlOOH such as boehmite or diasporite and other hydrated aluminas such as tohdite ($5\text{Al}_2\text{O}_3 \cdot \text{H}_2\text{O}$).

In another embodiment of the invention, a slurry or preformed panel containing a source of calcium such as Ca(OH)_2 and a source of alumina such as $\text{CaO} \cdot \text{Al}_2\text{O}_3$ or $3\text{CaO} \cdot \text{Al}_2\text{O}_3$ which is either premixed with the calcium source or applied separately, is applied over a concrete structure to sequester chloride ions from the concrete structure. An example of such a method of producing such an overlay is the following reaction.



The reaction product will convert to $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca(Cl)}_2 \cdot n\text{H}_2\text{O}$

wherein n=0 to 24 when it sequesters the chloride ion from the concrete structure.

It will be appreciated, therefore, that the present invention has provided an effective method and related compounds and structure for incorporating into concrete containing metal elements a class of compounds which will effectively resist undesired corrosion of the metallic compounds by both sequestration of chloride ions and provide a coating on the metallic elements, in some instances such as reactions that release nitrite. Other reactions, such as those which release nitrate alone, occur without providing such a coating.

It will be appreciated that the compositions of the present invention may be combined with fresh concrete as defined herein in many ways. For example, the composition may be combined in solid form (a) with concrete in a plastic state (b) with ready mix concrete at a job site (c) at the time of batching or (d) inter-blended with mineral admixtures of materials such as slag, fly ash, or silica fume, or (e) may be interblended with cement, for example. It may also be combined in slurry form in a suitable liquid such as Ca(OH)_2 solution at the time of batching, for example. These approaches are all within the scope of the present invention.

In another embodiment of the invention, the chloride ion sequestering component or chloride ion sequestering and nitrite releasing compound may be created in situ. The compound $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca(NO}_2)_2 \cdot n\text{H}_2\text{O}$ and similar compounds having the desired chloride ion sequestering or chloride ion sequestering and nitrite releasing capability may be created in this manner.

One manner of effecting creation of the desired compound in situ would be to add a solution containing NaAlO_4 , $\text{Ca(NO}_2)_2$ and /or NaNO_2 to mixing water to be employed to prepare fresh concrete. Alternatively, the added materials could be mixed directly with the water. During cement hydration, Ca(OH)_2 would be produced and would react with the added materials such as in reactions A and B. This results in in situ creation of a compound that both sequester chloride ion and releases nitrite.

As another approach, in lieu of relying on the concrete hydration to provide the Ca(OH)_2 , it may be admixed with one or more of NaAlO_4 , $\text{Ca(NO}_2)_2$ and NaNO_2 and, be added to fresh concrete or to the mixing water employed to prepare the fresh concrete.

Another approach to in situ creation would be to add calcium aluminate cement along with NaNO_2 or Ca(NO)_2 with or without Ca(OH)_2 to the concrete

making materials to create $3\text{CaO} \cdot \text{Al}_2\text{O}_3 \cdot \text{Ca}(\text{NO}_2)_2 \cdot n\text{H}_2\text{O}$ in situ wherein $n=0$ to 24 and preferably 12 to 18.

These general approaches may be employed in creating a slurry for remediation of concrete structures by mixing $\text{Ca}(\text{OH})_2$ with NaAlO_4 , $\text{Ca}(\text{NO}_2)_2$ and/or NaNO_2 and providing the same on existing concrete. This same approach can be employed in creating pre-formed overlay panels for use in remediation.

The hereinbefore described alternate sources of aluminum may be employed in this in situ embodiment along with NaNO_2 and/or $\text{Ca}(\text{NO}_2)_2$.

An alternate approach to the in situ embodiment would be to employ nitrate salts such as NaNO_3 or $\text{Ca}(\text{NO}_3)_2$ which would produce a compound that sequestered chloride ions, but would not yield nitrites which would result in an oxide protective layer on the metal elements.

In another embodiment of the invention employed to remediate a concrete structure, a solution containing a soluble source of alumina, such as NaAlO_4 , for example, is combined within a solution, which may be an aqueous solution, with at least one material selected from the group consisting of $\text{Ca}(\text{NO}_2)_2$ and NaNO_2 . This solution is introduced into the pores of the concrete structure to effect chlorine ion sequestration within the concrete structure. The components would react with each other and the $\text{Ca}(\text{OH})_2$ contained within the concrete in order to produce the corrosion inhibiting compound. The nitrite which results from the reaction will serve to effect the creation of oxide protective layer on the metal elements in the manner described hereinbefore. The solution may be introduced under pressure or by capillary suction after placing the solution on the concrete surface, for example, thereby creating a pressurized introduction into the pores. In the alternative, while not preferred the solution may be allowed to infiltrate the pores under the influence of gravity.

It will further be appreciated that the present invention provides a system for rehabilitation of an existing concrete structure through an overlay which contains compounds which serve to sequester chloride ions. It may also establish an oxide barrier layer on metal structural members associated with the concrete structure.

Certain preferred compounds have been disclosed herein, along with their method of use and resultant structure.

Whereas particular embodiments have been described herein for purposes of illustration, it will be evident to those skilled in the art that numerous variations of the details may be made without departing from the invention as defined in the appended claims.

5

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2